


SUPERVISION

Endglow® Fiber Optic Cable



Ideal for use with architectural lighting fixtures, landscape fixtures, star floors for pools, water-tight lenses and feature lights. Use with decorative Endglow™ fixtures.

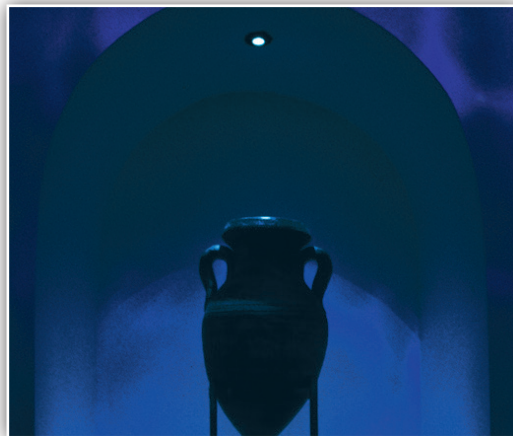

The only manufacturer of Fiber Optic Cable In The U.S.A.

- ▶ Heat Free Illumination
- ▶ Waterproof
- ▶ Flexible
- ▶ Energy Efficient
- ▶ Color Changing Capability
- ▶ Low Maintenance

PROAGUA PRODUCTS

1300 Pennington Road Orlando, Florida 32804 USA • Phone: 1.844.477.6248 • Email: sales@proaguaproducts.com

www.ProAguaProducts.com

ENDGLOW

Supervision | FIBER OPTIC CABLE

ITEM

DESCRIPTION

SPOOL SIZE (Sold by the foot)


SV4EG



SUPERVISION End emitting cable, .125" (3.2mm) in diameter Black jacket with 4 straight .030" (0.75mm) fiber optic strands.
Maximum (smallest) Bend Radius = .5" (12.7mm)

<u>MINI</u>	<u>SMALL</u>	<u>MED</u>	<u>LARGE</u>
1,500' 457M	3,000' 914M	310,500' 3,200M	N/A


SV8EG



SUPERVISION End emitting cable, 0.1875" (4.8mm) in diameter White jacket with 8 straight .030" (0.75mm) fiber optic strands.
Minimum (smallest) Bend Radius = .5" (12.7mm)

<u>MINI</u>	<u>SMALL</u>	<u>MED</u>	<u>LARGE</u>
1,200' 366M	3,300' 1,006M	6,500' 1,981M	8,000' 2,438M


SV12EG



SUPERVISION End emitting cable, .219" (5.5mm) in diameter Black jacket with 12 straight .030" (0.75mm) fiber optic strands.
Maximum (smallest) Bend Radius = .5" (12.7mm)

<u>MINI</u>	<u>SMALL</u>	<u>MED</u>	<u>LARGE</u>
1,000' 305M	2,500' 762M	5,000' 1,524M	7,000' 2,134M


SV25EG



SUPERVISION End emitting cable, .25" (6.35mm) in diameter Black jacket with 25 straight .030" (0.75 mm) fiber optic strands.
Maximum (smallest) Bend Radius = 1" (25.4mm)

<u>MINI</u>	<u>SMALL</u>	<u>MED</u>	<u>LARGE</u>
500' 152M	2,220' 610M	4,000' 1,219M	5,500' 1,676M


SV50EG



SUPERVISION End emitting cable, .312" (7.9mm) in diameter Black jacket with 50 straight .030" (0.75 mm) fiber optic strands.
Maximum (smallest) Bend Radius = 1" (25.4mm)

<u>MINI</u>	<u>SMALL</u>	<u>MED</u>	<u>LARGE</u>
350' 107M	700' 213M	2,200' 670M	2,500' 762M


SV75EG



SUPERVISION End emitting cable, 0.375" (9.54mm) in diameter Black jacket with 75 straight .030" (0.75mm) fiber optic strands.
Maximum (smallest) Bend Radius = 1.5" (38.09mm)

<u>MINI</u>	<u>SMALL</u>	<u>MED</u>	<u>LARGE</u>
200' 61M	650' 198M	1,200' 366M	1,800' 549M


SV100EG



SUPERVISION End emitting cable, .50" (12.5mm) in diameter Black jacket with 100 straight .030" (0.75mm) fiber optic strands.
Maximum (smallest) Bend Radius = 1.5" (38.09mm)

<u>MINI</u>	<u>SMALL</u>	<u>MED</u>	<u>LARGE</u>
N/A	250' 76M	500' 152M	750' 229M

SV150EG



SUPERVISION End emitting cable, 0.2812" (15.1mm) in diameter White jacket with 150 straight .030" (0.75mm) fiber optic strands.
Maximum (smallest) Bend Radius = 1.5" (38.09mm)

<u>MINI</u>	<u>SMALL</u>	<u>MED</u>	<u>LARGE</u>
N/A	250' 76M	500' 152M	750' 229M

PROAGUA PRODUCTS

1300 Pennington Road Orlando, Florida 32804 USA • Phone: 1.844.477.6248 • Email: sales@proaguaproducts.com

www.ProAguaProducts.com