

# SUPERVISION

Sideglow® Fiber Optic Cable



SUPERVISION  
Sideglow® application



*Suitable for interior and exterior applications, Supervision Sideglow® cable is UV protected and has an exterior jacket that is algacide and fungicide treated for maximum durability against the elements. Sideglow® cable is strong enough for amusement park rides, extreme cold weather as well as underwater applications. With no heat or electricity in the cable, typical lighting design restrictions are eliminated, creating a multitude of design possibilities.*

The only manufacturer of Fiber Optic Cable In The U.S.A.



- ▶ Heat Free Illumination
- ▶ Underwater Safe
- ▶ Flexible
- ▶ Energy Efficient
- ▶ Safe Neon Alternative
- ▶ Durable
- ▶ Color Changing Capability
- ▶ Low Maintenance


## PROAGUA PRODUCTS

1300 Pennington Road Orlando, Florida 32804 USA • Phone: 1.844.477.6248 • Email: sales@proaguaproducts.com

[www.ProAguaProducts.com](http://www.ProAguaProducts.com)


# SIDEGLOW

## Side Glow | FIBER OPTIC CABLE

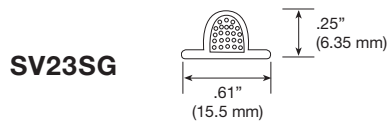


**SUPERVISION** 23 strand side emitting perimeter cable, 5/8" x 5/16  
 1" Minimum Bend Radius = .1" (25.4mm) **200ft Maximum Run**

MODEL #	LENGTH	CTN. WEIGHT
SV23SG-125	125 ft.	11 lbs.
SV23SG-150	150 ft.	13 lbs.
SV23SG-200	200 ft.	19 lbs.
SV23SG-500	500 ft.	48 lbs.
SV23SG-1000	1000 ft.	84 lbs.




**SUPERVISION** 32 strand side emitting perimeter cable, .5/16" diameter  
 1" Minimum Bend Radius = .1" (25.4mm) **200ft Maximum Run**

MODEL #	LENGTH	CTN. WEIGHT
SV32SG-125	125 ft.	8 lbs.
SV32SG-150	150 ft.	9 lbs.
SV32SG-200	200 ft.	12 lbs.
SV32SG-500	500 ft.	35 lbs.
SV32SG-1000	1000 ft.	58 lbs.




**SUPERVISION** 42 strand side emitting perimeter cable, .3/8" diameter"  
 1/2" Minimum Bend Radius **200ft Maximum Run**

MODEL #	LENGTH	CTN. WEIGHT
SV42SG-125	125 ft.	6 lbs.
SV42SG-150	150 ft.	7 lbs.
SV42SG-200	200 ft.	9 lbs.
SV42SG-500	500 ft.	31 lbs.
SV42SG-1000	1000 ft.	50 lbs.



**SUPERVISION** 84 strand side emitting perimeter cable, .5" diameter  
 1/2" Minimum Bend Radius **200ft Maximum Run**

MODEL #	LENGTH	CTN. WEIGHT
SV84SG-125	125 ft.	12 lbs.
SV84SG-150	150 ft.	14 lbs.
SV84SG-200	200 ft.	18 lbs.
SV84SG-500	500 ft.	62 lbs.
SV84SG-1000	1000 ft.	100 lbs.

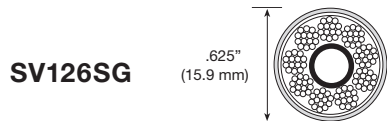

**SUPERVISION** 126 strand side emitting perimeter cable, .625" diameter  
 1/2" Minimum Bend Radius **200ft Maximum Run**

MODEL #	LENGTH	CTN. WEIGHT
SV126SG-125	125 ft.	18 lbs.
SV126SG-150	150 ft.	21 lbs.
SV126SG-200	200 ft.	27 lbs.
SV126SG-500	500 ft.	93 lbs.
SV126SG-1000	1000 ft.	150 lbs.